

Four Door Access Controller



Features


- > Support 100,000 valid cards & 300,000 records
- > Support multiple cards
- > Support card, password, fingerprint and combination
- > TCP/IP or RS-485 interface to PC
- > Wiegand or RS-485 interface to readers(2/4 door)
- > Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- > Anti-pass back, multi-door interlock, multi-card open
- > Support 128 efficient time and holiday schedules
- > Watch dog function ensure device free from halting
- > Surface mounted installation



Technical Specifications

Model	GV-AC-CON
System	
Main Processor	32 Bit
Memory	16M(32M External)
Input/Output Ports	
Input	Inputs x 9 (door sensor x 4, exit button x 4, alarm x 1)
Output	Relay x 5(door lock x 4, alarm x 1)
Reader	Reader x 4
Capacity	
Cardholders/Events	100,000/150,000
Function	
User Management	General, VIP, Guest, Patrol, Black list, Force
Alarm Function	Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm
Schedule Setting	Support 128 groups of schedule, 128 groups of period and 128 groups of holiday period
Interface	
To PC	RJ45(10/100M)/RS485
To Reader	Wiegand/ RS485
General	
RTC	Yes
Ingress protection	IP55
Power Supply	9-15DC/500mA
Internal Battery	1204C Support
Working Environment	-30°C - +60°C
Working Humidity	≤95%
Dimension(W×D×H)	210*98*51mm
Weight	0.5Kg

System Connection

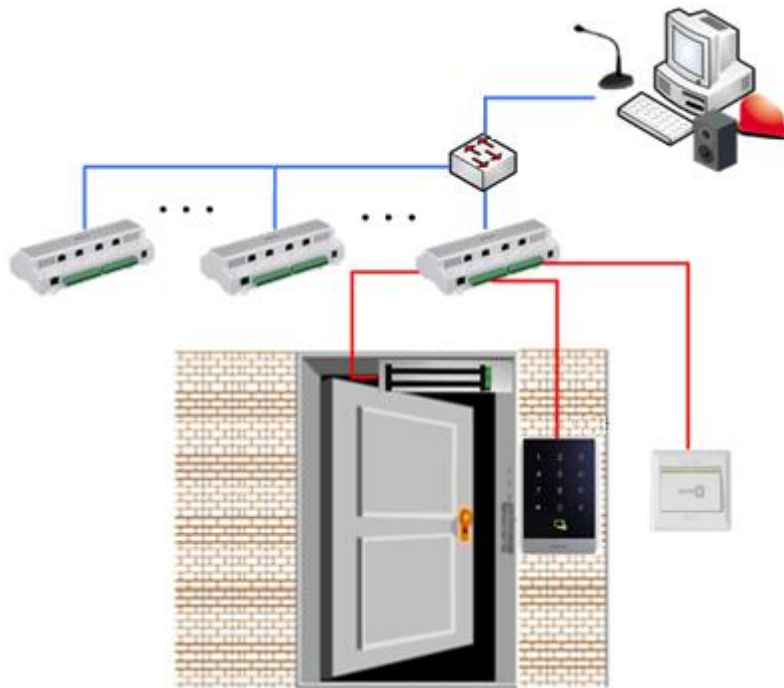

GigaView - security

9 De Montfort Street, Leicester

Tel: +44 208 897 6964

Email: info@gigaview-security.com

Website: www.gigaview-security.com

*Design and specifications are subject to change without notice.

© 2016 GigaView - security