

Product overview

Giganet Breakout Patching Panel is designed to provide housing for connections from an incoming preterm or trunks from the rear of the panel to patch cords on the front. The Open frame allows for quick and easy installation. It accepts up to 96FO with LC.



Figure 1.
Giganet 1U Breakout Patching Panel – 96 Fibre

Product Features and Applications

FEATURES

1U height with SC, LC or MTP/MPO Thru Adapters
Up to 96FO in LC
Channel to route the patch cords to the rear of the rack within the 1U space
RoHS, Reach and SvHC

APPLICATIONS

Datacenter & Enterprise network
Indoor Application
Accepts Indoor and Outdoor Pre-terminated cables

Product Specification

GENERAL SPECIFICATION	
Mounting Type	Rack 19"
Height Unit	1U
Material	Cold rolled steel
Housing Color	Black
Application	Indoor IP20
Lockable	No
Dimensions (W x D x H in MM)	490 x 285.6 x 44
Net Weight	2.3KG

DESIGN HARDWARE	
Opening Type	Fixed
Access Type	Front access
Front Cable Management	Removable hinged door
Cable Entry Direction	Rear and Front
Rear Cable Management	Support bar
Slot Type	SC Simplex / LC Duplex or MTP/MPO Footprint
Number of Slots	48
Fibre Capacity	Up to 96 in LC / 48 in SC

Technical Drawing

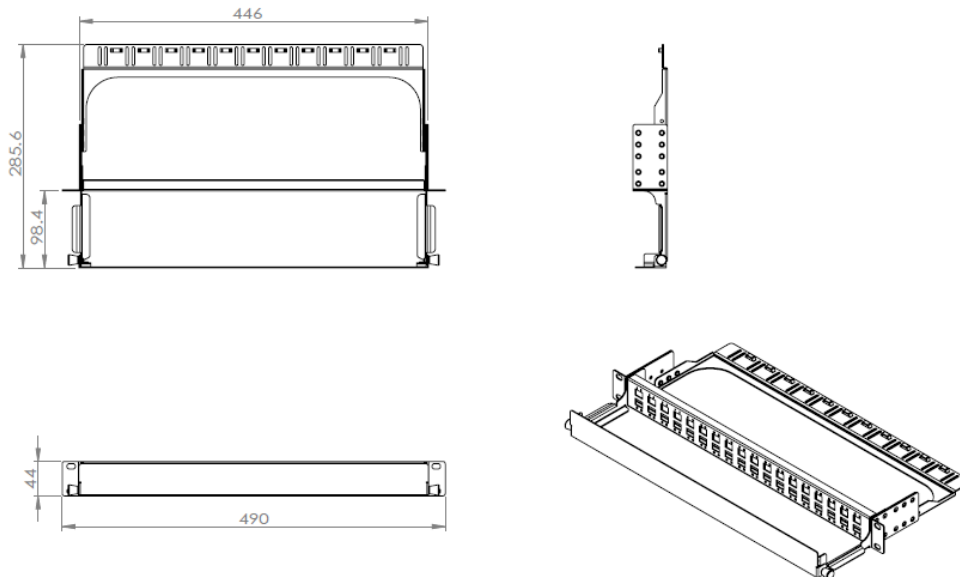


Figure 2.
 Giganet 1U Breakout Patching Panel – 96 Fibre Technical Drawing

Ordering Information

Part Number	Product Description
GN-HD-OBP-03	1U BREAKOUT PATCHING PANEL BLANK – 96 FIBRE

Note: Different types of Flange Adapters (SC Simplex / LC Duplex or MTP/MPO Footprint) can be used with these panels and adapters are supplied separately.